


OBO Pro.2 AC190 Noise-Reduction Chamber

Introduction :

This chamber provides a reliable and stable test environment for microphones and microphone modules.

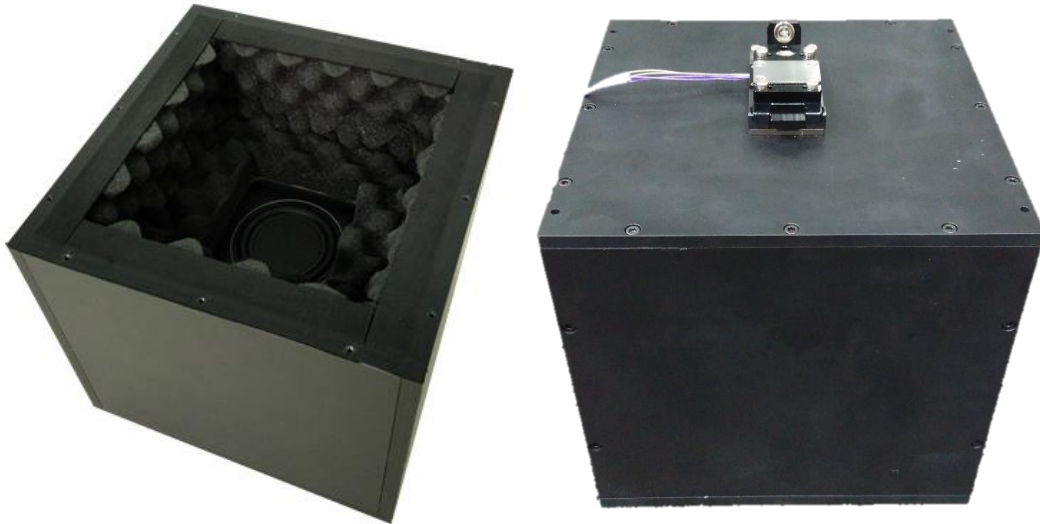

Chamber Features :

- Insulation against background noise.
- Sound Insulation Ability: >20 dB(A-Weighting) SPL ref. 20uPa
- Portable size and weight
- Designed for production line use
- Flexible upper cover design
- Auto scanner function (Option)

Specification :

Outside Dimension:	W:190mm*D:190mm*H:175mm
Net Weight:	~ 4Kg
Construction:	Aluminum
Sound Pressure Level	102 dBSPL @1 Vrms
Frequency Response	100~20K Hz
Total Harmonic Distortion	<1% @ 94dBSPL (100Hz~20kHz)
Sound Insulation Ability:	>20dB(A-Weighting) SPL ref. 20uPa